
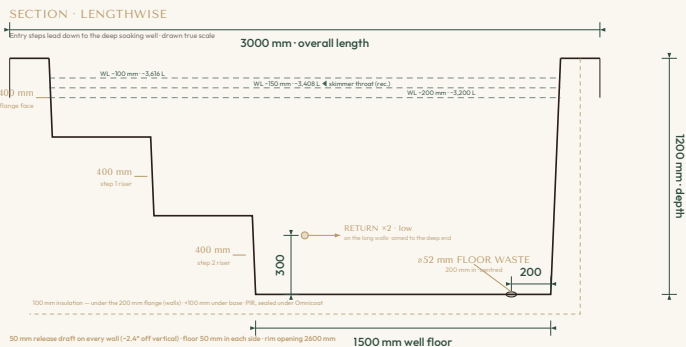


PLAN · BIRDEYE

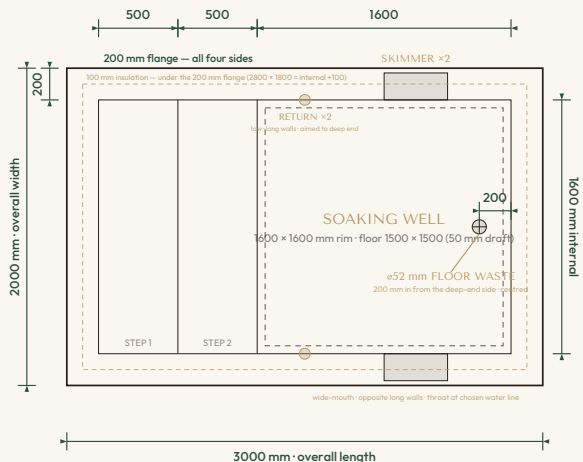

## Bespoke Step-Entry Soaking Tub

|                    |                                                                                                                                                      |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| OVERALL SIZE       | 3000 × 2000 × 1200 mm (L×W×D)                                                                                                                        |
| FLANGE             | 200 mm surround, all four sides                                                                                                                      |
| SOAKING WELL       | 1600 × 1600 mm · 1200 mm deep                                                                                                                        |
| INTERNAL OPENING   | 2600 × 1600 mm (at rim)                                                                                                                              |
| ENTRY STEPS        | 2 steps · tread/riser 500/400 + 500/400 mm · 400 mm flange face                                                                                      |
| WASTE              | Floor waste · deep well · 200 mm in from the deep-end short side, centred · ø52 mm                                                                   |
| DRAFT (RELEASE)    | 50 mm per wall, rim→floor (~2.4° off vertical) · floor 50 mm in each side                                                                            |
| WATER (CONCEPT)    | ~4,032 L brim · lines -100 ~3,616 L · -150 ~3,408 L (rec.) · -200 ~3,200 L below rim · skimmer throat = chosen line                                  |
| CIRCULATION        | 2 skimmers (deep-end long walls) + 2 low returns (step-end long walls) → length-wise turnover to the skimmers                                        |
| WEIGHT (EST.)      | ~155 kg dry · standard 7-layer build                                                                                                                 |
| INSULATION         | +100 mm option · ~285 kg dry · tucks under the 200 mm flange (line 2800 × 1800 = internal +100) · footprint unchanged · +100 mm under base → 1400 mm |
| MATERIAL           | 7-layer Omnitel built-up system · up to 13-layer with insulation upgrade                                                                             |
| COLOUR             | Pure White (BS 4800 00 E 55) · matched to any RAL · Pantone · Farrow & Ball · Dulux                                                                  |
| LEAD TIME          | Bespoke · made to order                                                                                                                              |
| WARRANTY / MADE IN | 30-year · Somerset, United Kingdom                                                                                                                   |

**Note** — Reconciled from operator master V1.0; plan closes 200+500+500+1600+200=3000; first 400 mm vertical is the flange face, not a step. V1.5 adds a 50 mm RELEASE DRAFT — every wall draws in 50 mm rim→floor (~2.4°) so the part lifts from the mould; rim opening unchanged (2600×1600), well floor 1500×1500. Weight, capacity and insulation are first-order estimates — confirm against a real lay-up before quoting.

All dimensions in millimetres · Drawn at scale 1:20 · CONCEPTUAL DESIGN — NOT FOR MANUFACTURE · dimensions to be confirmed before tooling.