


VIEWED FROM ABOVE

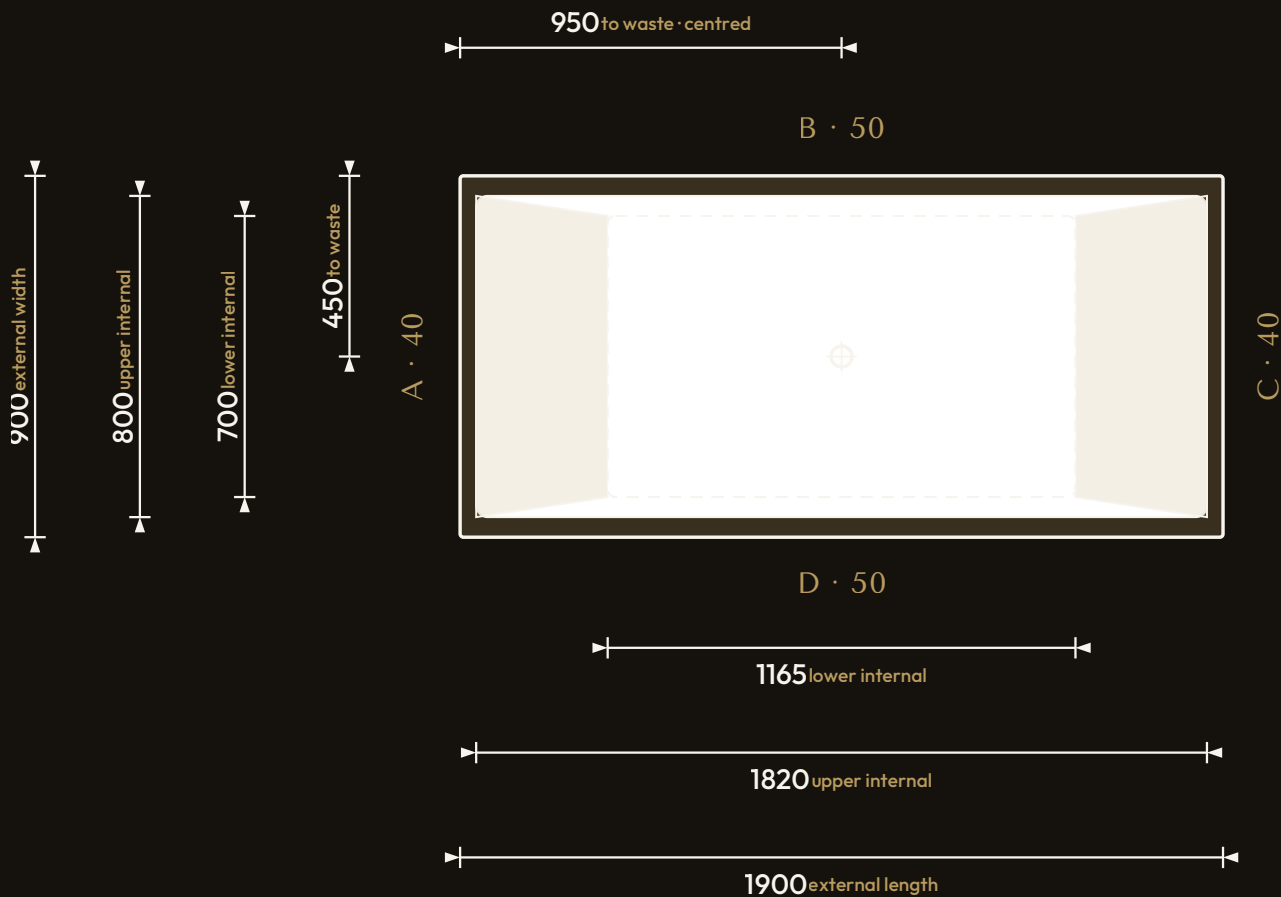


Specification

DIMENSIONS	1900 × 900 × 525 mm
INTERNAL DEPTH	500 mm
EXTERNAL HEIGHT	525 mm
SOAK DEPTH	up to 500 mm · ~425 mm with an overflow
OPENING (INTERNAL)	1820 × 800 mm
BASE (INTERNAL)	1165 × 700 mm
FLANGES	short 40 mm (A/C) · long 50 mm (B/D)
VERTICAL FLANGE	35 mm
TAPER	both ends rake 328 mm · sides 50 mm
CORNER RADIUS	~27.5 mm internal
WASTE	ø 52 mm (1½" BSP) hole
MATERIAL	Hand-built Omnitel® · 7-layer built-up system · hand-polished
COLOUR	Any colour · through-coloured Omnitel, never painted on
INSTALLATION	Above-floor, fully supported & dead level · or undermounted, overmounted, inset, part-submerged or raised
DELIVERY	Free UK Mainland Named Day Delivery · international to 220+ countries
WARRANTY	30-year
MADE IN	Somerset, United Kingdom


Note · the base falls toward the waste and is not flat. Set the tub dead level on a continuous mortar bed, packers, a foam base or silicone — fully supported and secure.

FOR INSTALLATION

END PROFILE

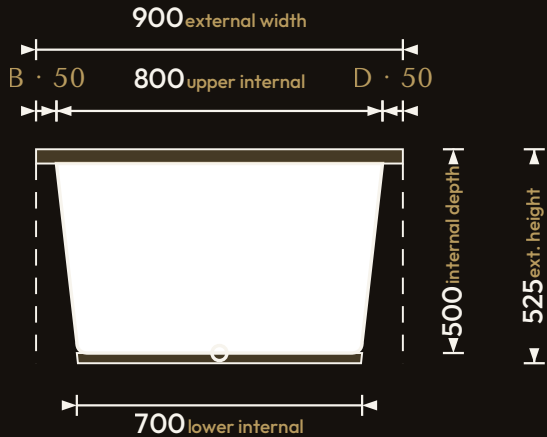

SIDE PROFILE

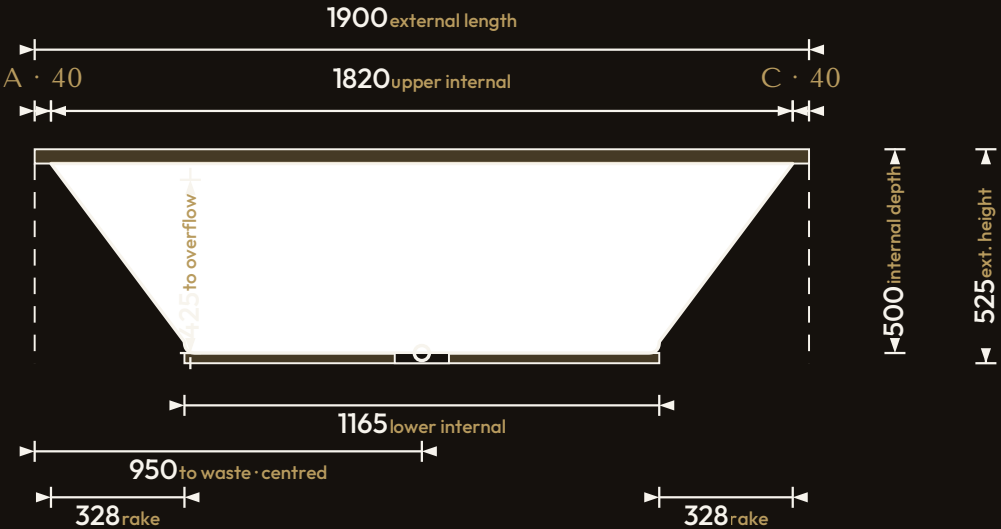

35 mm vertical flange · both ends rake 328 mm · sides 50 mm · 25 mm full-width built-in base · all in mm

Note · the base falls toward the waste and is not flat. Set the tub dead level on a continuous mortar bed, packers, a foam base or silicone — fully supported and secure.