

DEEP SOAKING TUB

# Omnitub 1050×1050

1050 × 1050 × 625 mm

600 mm internal soaking depth · 625 mm external height

Hand-built Omnigel® · white in stock · any colour made to order · white Omnitub feet · 65–135 mm adjustable · 70 mm travel · 30-year warranty


ORDER OR ASK US ANYTHING

ONLINE [www.omnitub.co.uk](http://www.omnitub.co.uk)


PHONE +44 1934 751 200

WHATSAPP +44 1934 751 200

EMAIL [info@omnitub.co.uk](mailto:info@omnitub.co.uk)

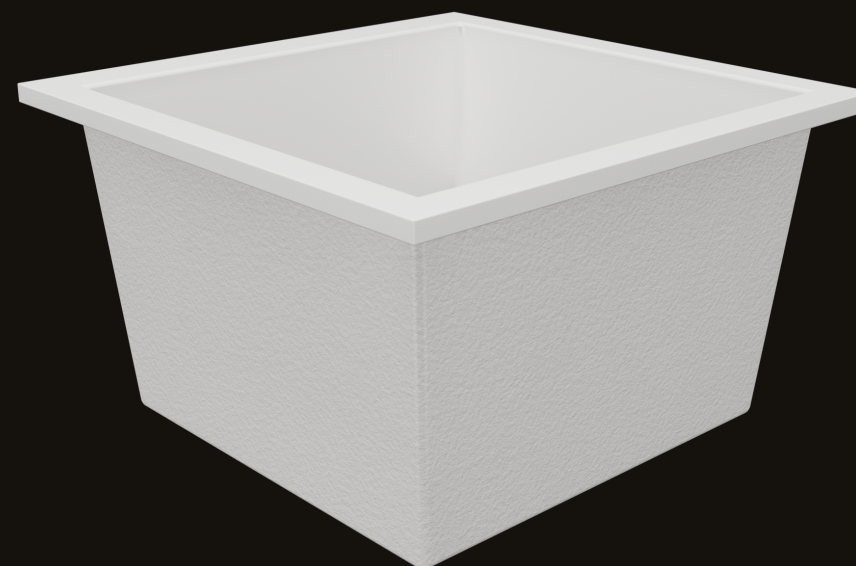

VIEWED FROM ABOVE

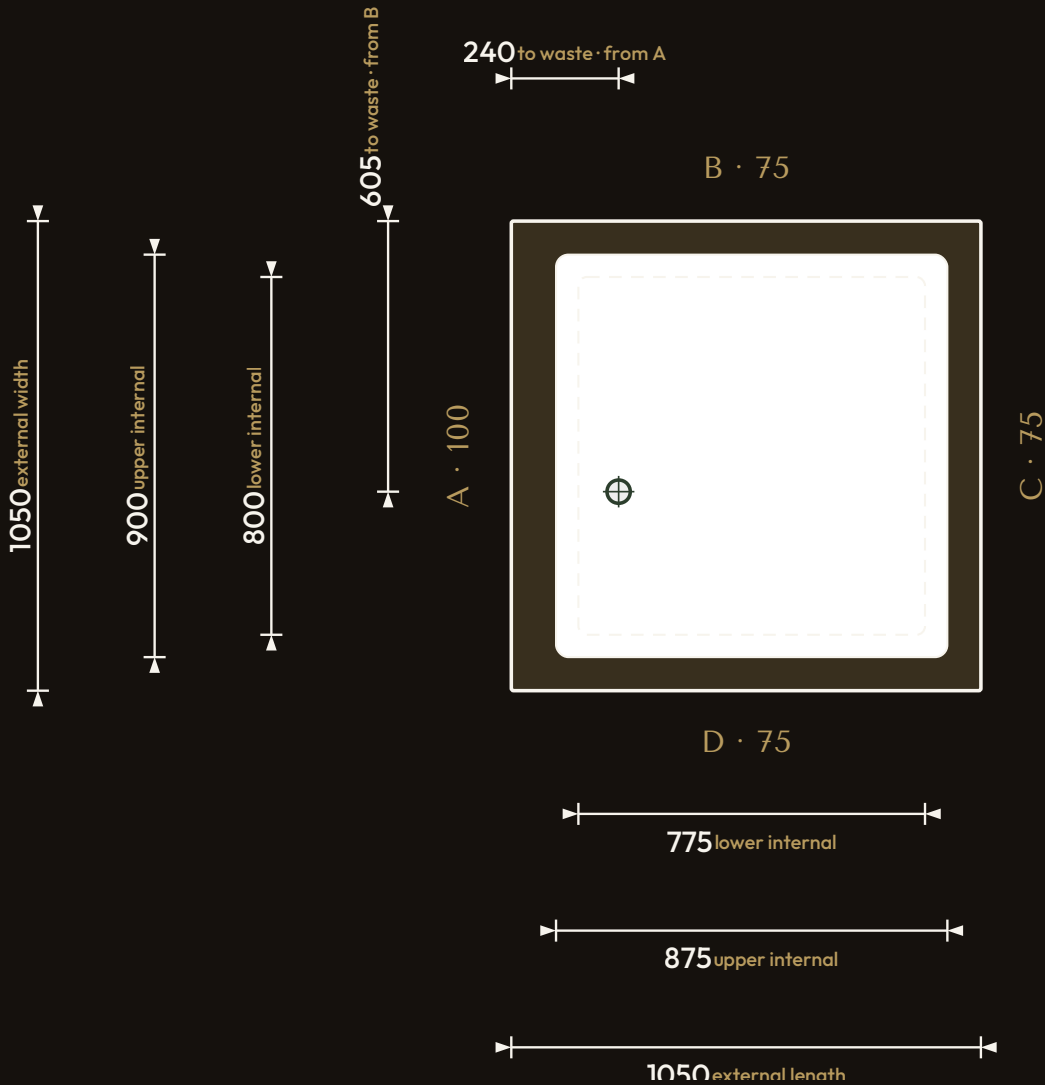


Specification

|                    |                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------|
| DIMENSIONS         | 1050 × 1050 × 625 mm                                                                                       |
| INTERNAL DEPTH     | 600 mm                                                                                                     |
| EXTERNAL HEIGHT    | 625 mm                                                                                                     |
| SOAK DEPTH         | up to 600 mm · 525 mm with overflow                                                                        |
| OPENING (INTERNAL) | 875 × 900 mm                                                                                               |
| BASE (INTERNAL)    | 775 × 800 mm                                                                                               |
| NET WEIGHT         | 25.2 kg (empty)                                                                                            |
| FLANGES            | A 100 mm · B/C/D 75 mm                                                                                     |
| VERTICAL FLANGE    | 35 mm                                                                                                      |
| TAPER              | 50 mm per side over the depth                                                                              |
| CORNER RADIUS      | ~27.5 mm internal                                                                                          |
| WASTE              | ø 52 mm (1½" BSP) hole                                                                                     |
| INSULATION         | Optional upgrade — 50 mm built in (13-layer build) · underside insulation also available · sold separately |
| MATERIAL           | Hand-built Omnigel® · 7-layer built-up system · hand-polished                                              |
| COLOUR             | Any colour · through-coloured Omnigel, never painted on                                                    |
| INSTALLATION       | Above-floor, fully supported & dead level · or undermounted, overmounted, inset, part-submerged or raised  |
| DELIVERY           | Free UK Mainland Named Day Delivery · international to 220+ countries                                      |
| WARRANTY           | 30-year                                                                                                    |
| MADE IN            | Somerset, United Kingdom                                                                                   |


Note · the base falls toward the waste and is not flat. Set the tub dead level on a continuous mortar bed, packers, a foam base or silicone — fully supported and secure.

## FOR INSTALLATION

### END PROFILE

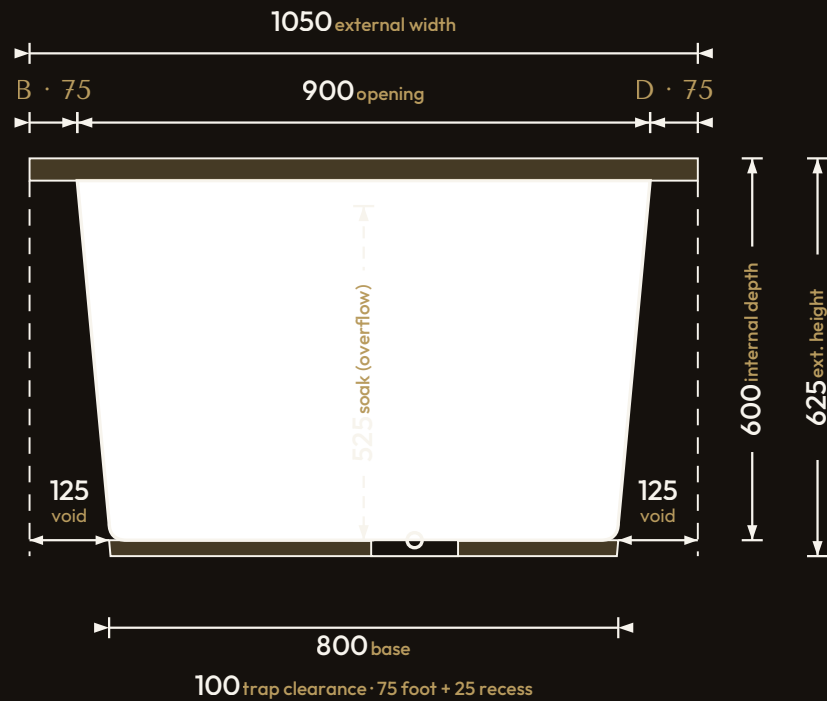

### SIDE PROFILE

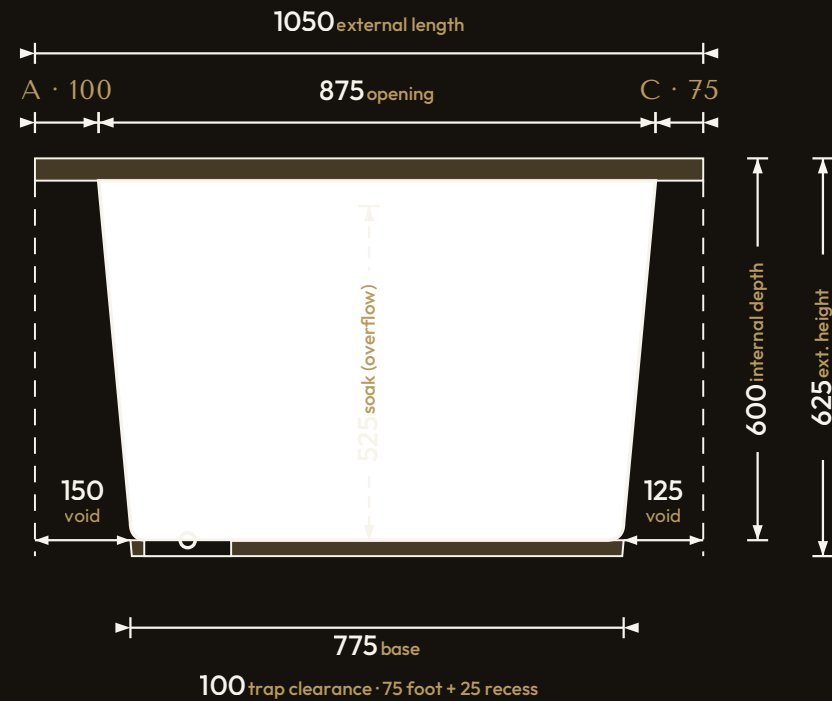


35 mm vertical flange · 50 mm taper / side · both profiles


**Profiles (no feet):** END = section through the width; SIDE = section through the length, drawn to the same scale. Full-width external body with a recessed, tapered soaking well — 50 mm/side over the 600 mm depth, on a 35 mm vertical flange below the flat rim. The "void" is the clearance each side at the base for soil-stack / pipe runs. Flange A 100 mm; B, C, D 75 mm. All dimensions in millimetres.

## FOR INSTALLATION · WITH FEET

### END PROFILE

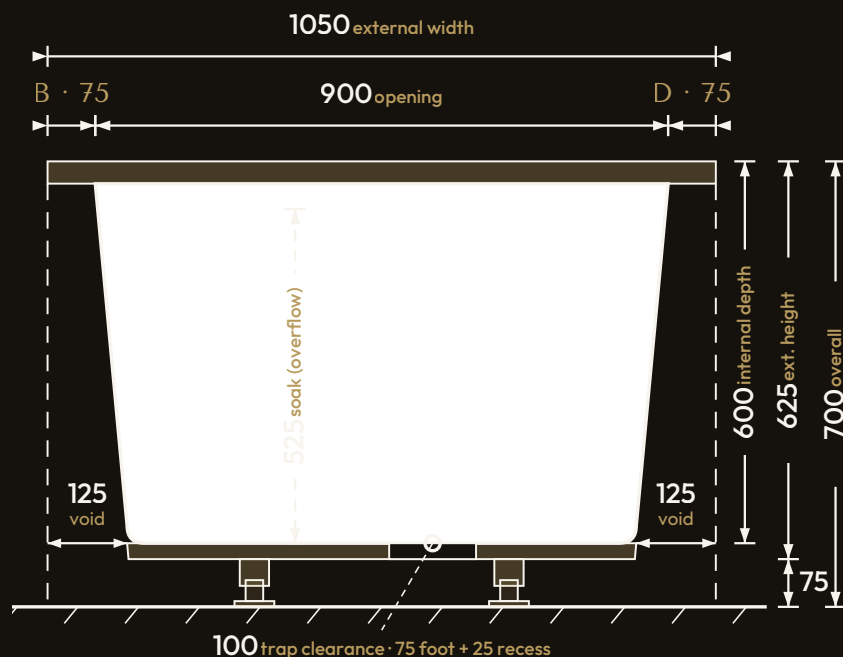

### SIDE PROFILE

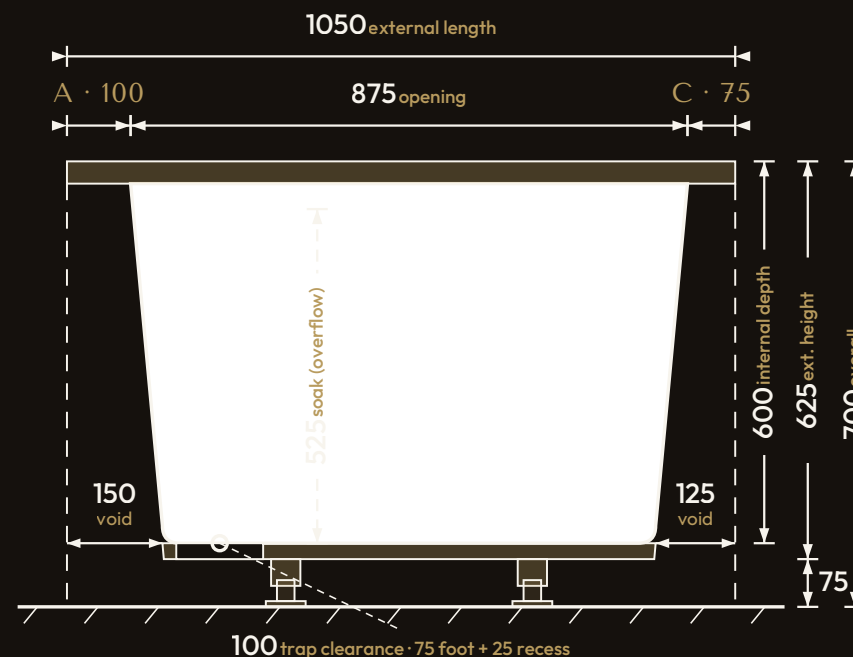

White Omnitub feet · 65–135 mm adjustable · 70 mm travel · 700 mm benchmark · adjusts up to 760 mm · both profiles

**Installed on the feet:** 4 white Omnitub feet (END view shows 2, SIDE view shows 2) — **65–135 mm adjustable, 70 mm travel**. Extend each foot fully to lock, then wind it down to suit. Shown at the **700 mm overall** benchmark (625 mm tub + 75 mm foot); overall install height 690–760 mm. The underside recess gains 25 mm, giving 100 mm of trap clearance at the waste. No load figure published. All dimensions in millimetres.

GET IN TOUCH

# Omnitub Ltd

特 オムニタブ HANDMADE IN SOMERSET

ONLINE [www.omnitub.co.uk](http://www.omnitub.co.uk)

PHONE +44 1934 751 200

WHATSAPP +44 1934 751 200

EMAIL [info@omnitub.co.uk](mailto:info@omnitub.co.uk)

SHOWROOM Unit 6 Works 22, Bennett Road, Highbridge, TA9 4PW

WORKSHOP Unit 5 Batch Business Park, Lympsham, BS24 0ES

White is always in stock; every colour is made to order. White Omnitub feet supplied — 65–135 mm adjustable, 70 mm travel. Every Omnitub is hand built in Somerset from our 7-layer Omnigel® built-up system, backed by a 30-year warranty.

