


VIEWED FROM ABOVE

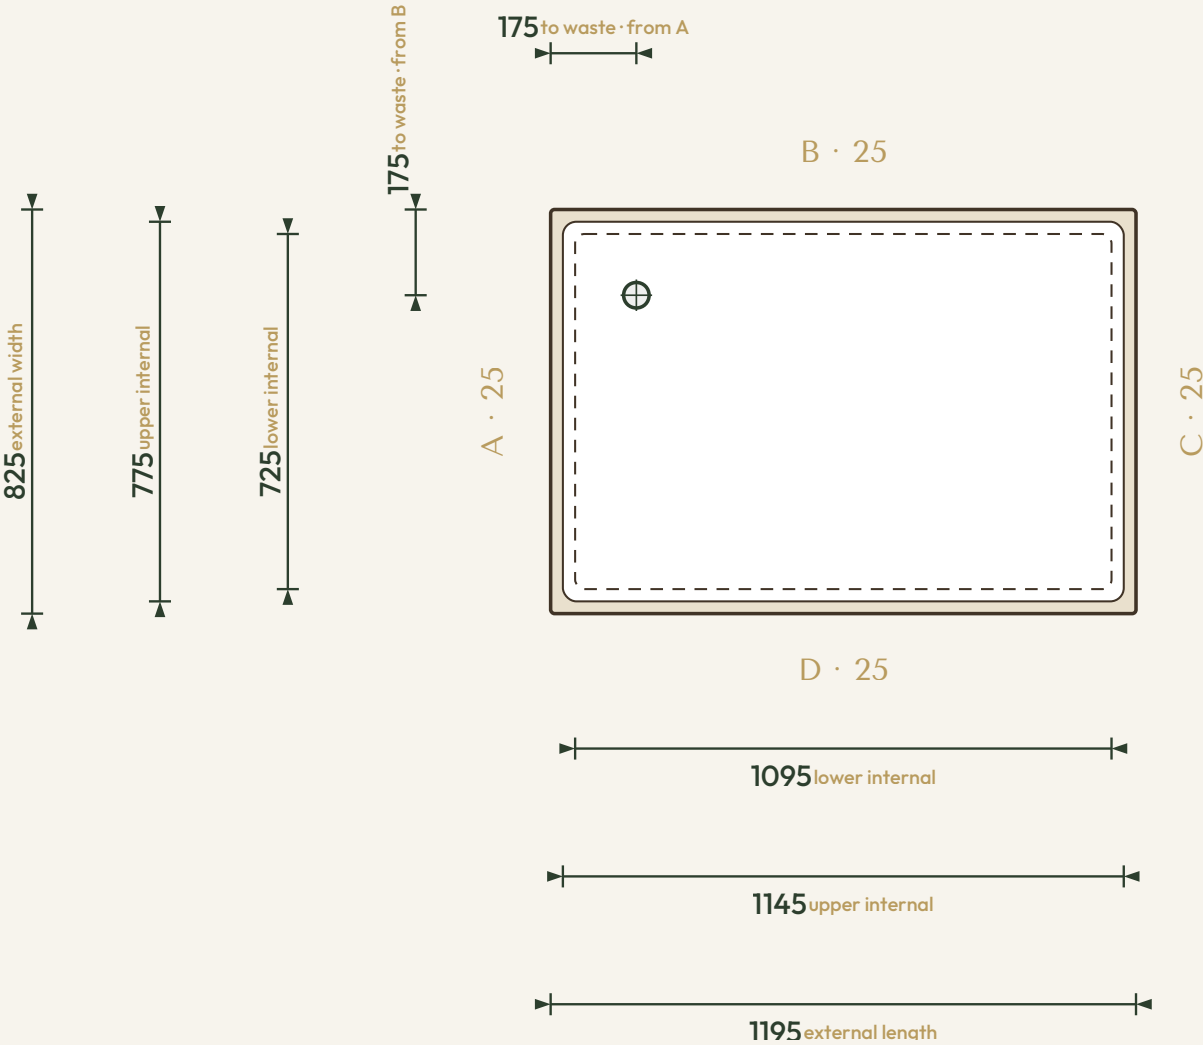


Specification

DIMENSIONS	1195 × 825 × 1225 mm
INTERNAL DEPTH	1200 mm
EXTERNAL HEIGHT	1225 mm
SOAK DEPTH	up to ~1125 mm with overflow · 1200 mm to brim
OPENING (INTERNAL)	1145 × 775 mm
BASE (INTERNAL)	1095 × 725 mm
FLANGES	A 25 mm · B/C/D 25 mm
VERTICAL FLANGE	25 mm
TAPER	25 mm per side over the depth
CORNER RADIUS	~27.5 mm internal
WASTE	ø 52 mm (1½" BSP) hole
INSULATION	Optional upgrade — 50 mm built in (13-layer build) · underside insulation also available · sold separately
MATERIAL	Hand-built Omnitel® · 7-layer built-up system · hand-polished
COLOUR	Any colour · through-coloured Omnitel, never painted on
INSTALLATION	Above-floor, fully supported & dead level · or undermounted, overmounted, inset, part-submerged or raised
DELIVERY	Free UK Mainland Named Day Delivery · international to 220+ countries
WARRANTY	30-year
MADE IN	Somerset, United Kingdom

Note · the base falls toward the waste and is not flat. Set the tub dead level on a continuous mortar bed, packers, a foam base or silicone — fully supported and secure.


FOR INSTALLATION

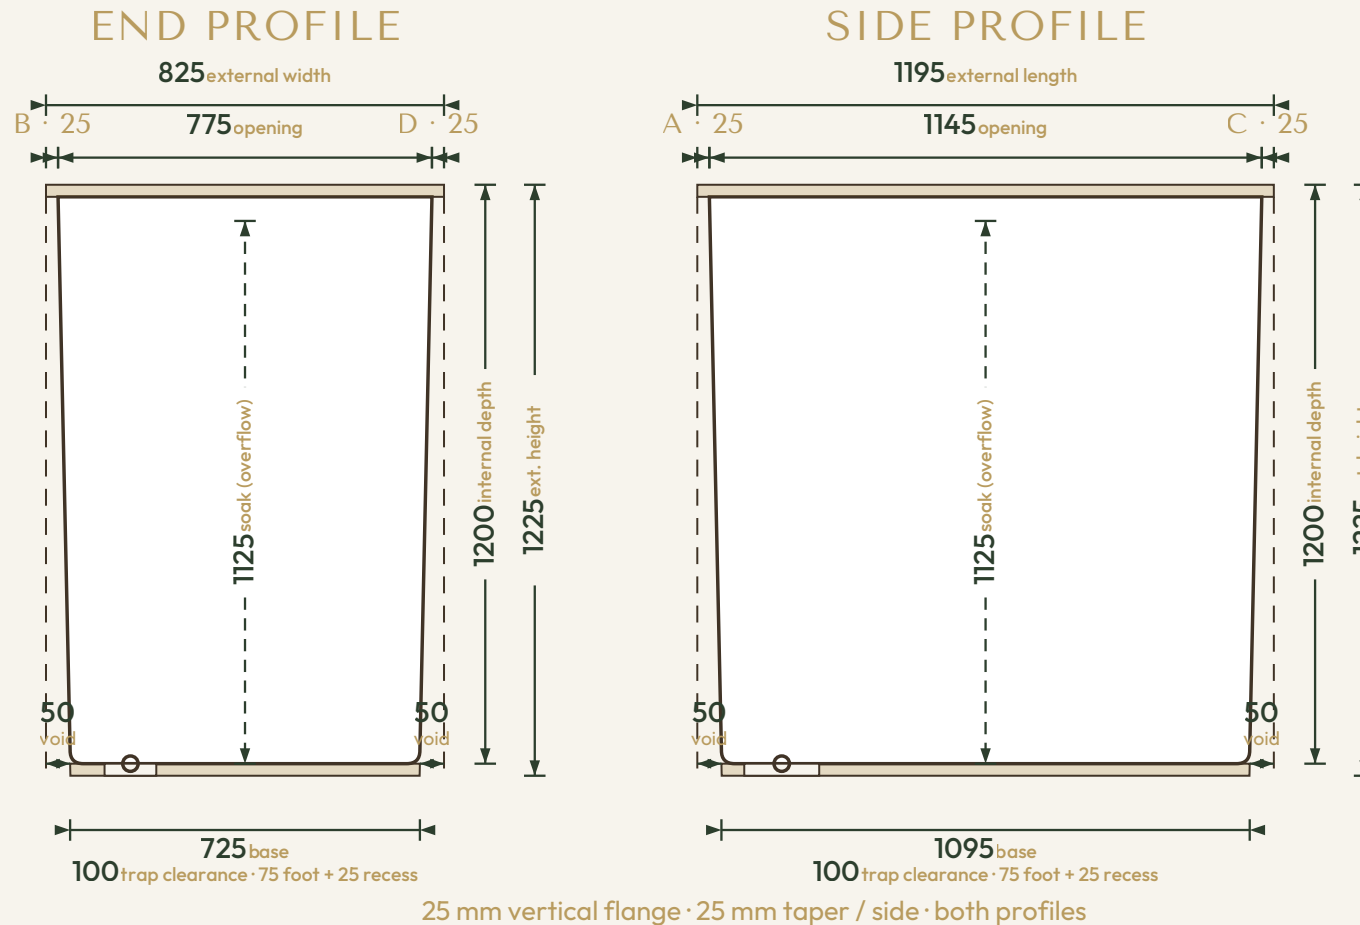

25 mm vertical flange · 25 mm taper / side · 25 mm full-width built-in base · all dimensions in mm

Note · the base falls toward the waste and is not flat. Set the tub dead level on a continuous mortar bed, packers, a foam base or silicone — fully supported and secure.

FOR INSTALLATION · WITH FEET

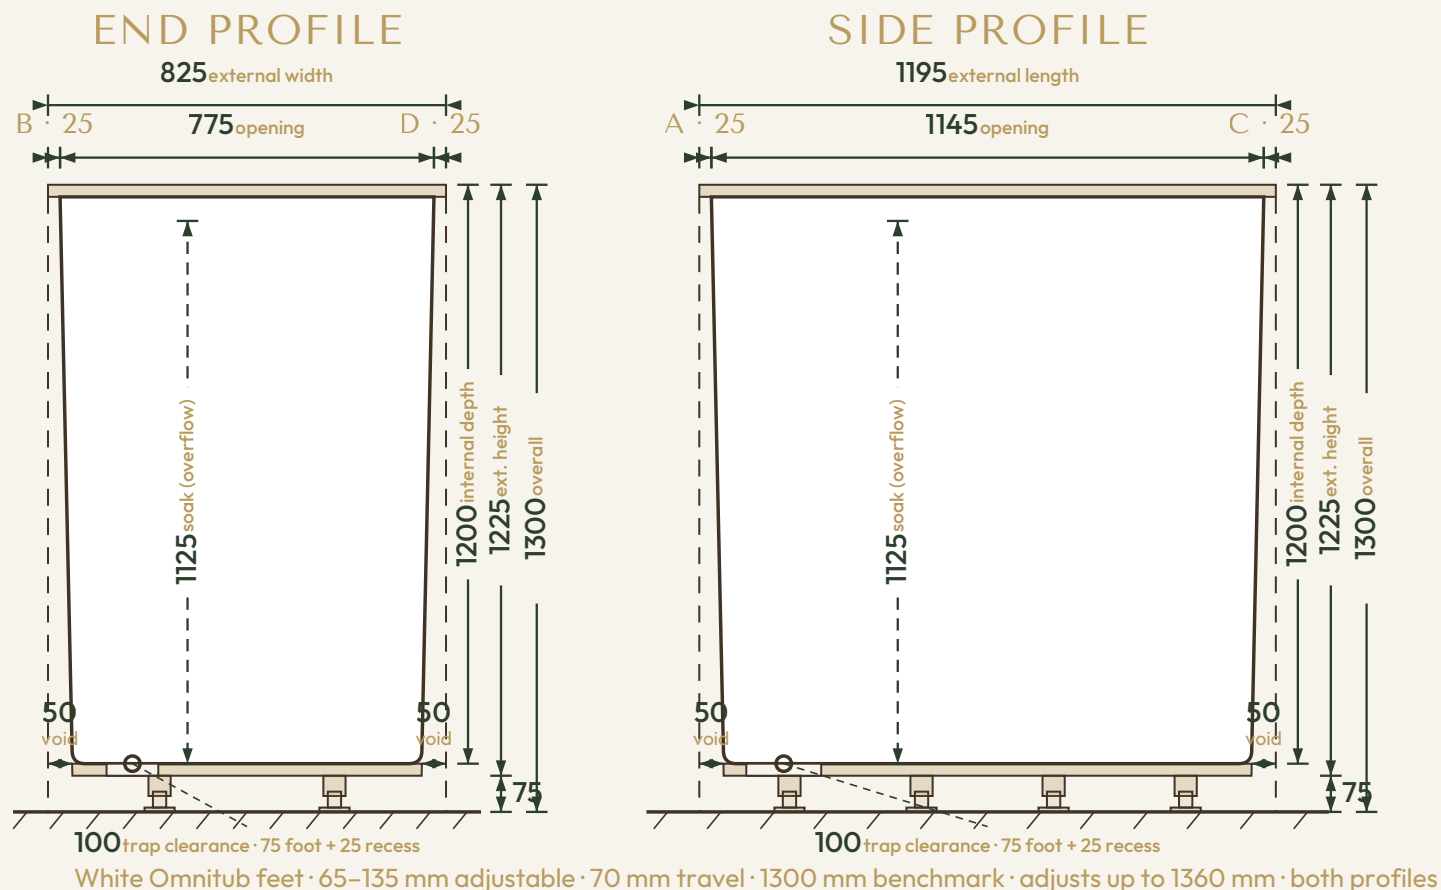

Installed on the feet: 8 white Omnitub feet (END view shows 2, SIDE view shows 4) — **65–135 mm adjustable, 70 mm travel**. Extend each foot fully to lock, then wind it down to suit. Shown at the **1300 mm overall** benchmark (1225 mm tub + 75 mm foot); overall install height 1290–1360 mm. The underside recess gains 25 mm, giving 100 mm of trap clearance at the waste. No load figure published. All dimensions in millimetres.