

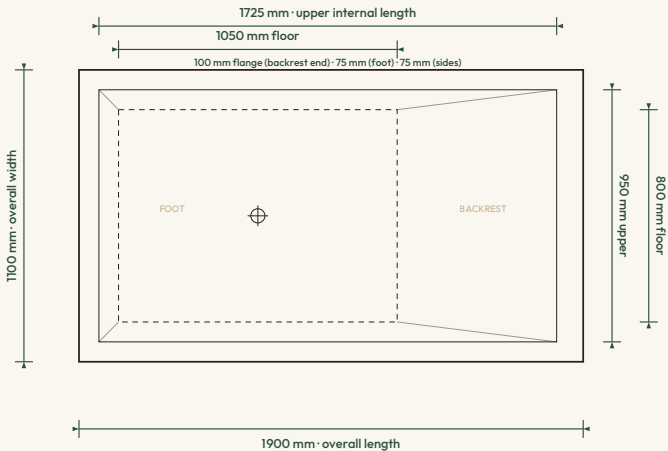


PLAN · BIRDSEYE



SECTION · CROSS

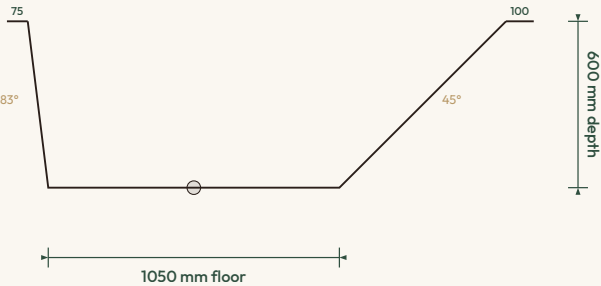


Repose 1900 · Reclined Soaking Tub

OVERALL SIZE	1900 × 1100 mm footprint
HEIGHTS	600 mm internal depth · 625 mm external height
SOAK DEPTH	~525 mm to overflow
FLANGES	100 mm backrest end · 75 mm foot · 75 mm sides
UPPER INTERNAL	1725 × 950 mm (at rim)
FLOOR INTERNAL	1050 × 800 mm
WALL SLANTS	45° reclined backrest · 83° foot · 83° sides — over 600 mm
WASTE	Central waste hole · ø 52 mm
FEET	8 Omnitub® self-levelling feet · ~700 mm install benchmark · adjusts to ~760 mm
MATERIAL	Hand-built Omnigel® · 7-layer built-up system
SURFACE	Hand-polished Omnigel®
COLOUR	Pure White (BS 4800 00 E 55) · matched to any RAL · Pantone · Farrow & Ball · Dulux
INSTALLATION	Above-floor on the self-levelling feet, fully supported & dead level · or undermounted, inset or part-submerged
LEAD TIME	Made to order · pre-order
WARRANTY	30-year
MADE IN	Somerset, United Kingdom


All dimensions in millimetres · Drawn at scale 1:14 · Omnitub® self-levelling feet supplied with every tub · 100% at order · Ships from 1 July 2026 · technical specification

FOR INSTALLATION · ON OMNITUB® SELF-LEVELLING FEET

INSTALLED · SIDE

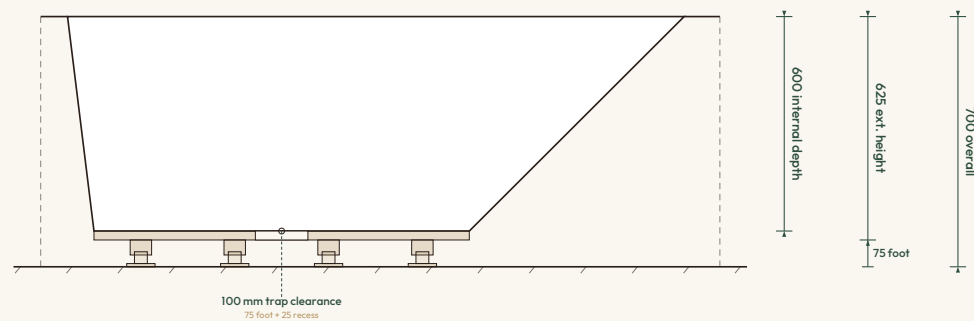

INSTALLED · END

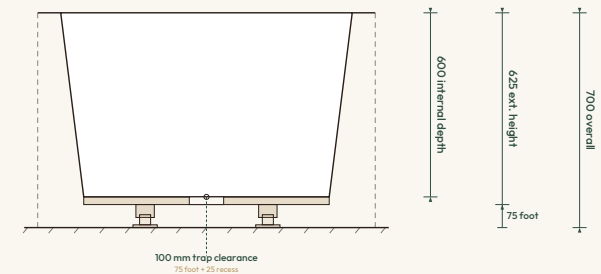

Installed on the feet — 8 Omnitub® self-levelling feet (SIDE view shows 4, END view shows 2). They are **not fixed height**: extend, lock, then wind down to suit. Commonly set to a **700 mm overall** install height (625 mm tub + 75 mm foot) and adjustable to ~760 mm. The 25 mm underside recess gives 100 mm of trap clearance at the waste. Fully support and seal once levelled. All dimensions in millimetres.

Omnitub® self-levelling feet supplied with every tub · 100% at order · Ships from 1 July 2026 · technical specification